



**INYATHI
LADDERS**
Your Ladder Connection

YOUR LADDER CONNECTION




Tel (+27) / 010 222 0042 / 011 794 4456

Unit 3 & 4, Bition Mini Park, 1474 Cranberry Street, Honeydew, South Africa, 2170

office@inyathiladders.co.za

www.inyathiladders.co.za

General Information:

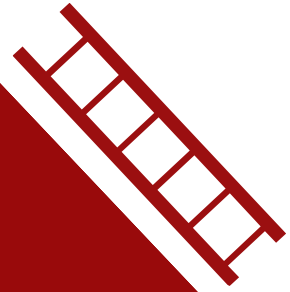

Aluminium A-Frame Ladders

Page 3 - 6


- Strong and safely designed;
- Rust-proof;
- Full aluminium;
- Suitable for commercial and light industrial use;
- Non-slip, profiled steps (8 cm deep) to promote secure footing;
- 30 cm step raise for comfortable climbing;
- Moulded PVC top with parts tray and tool holder;
- Non-slip, non-scuff PVC feet to promote safety and stability;
- Strong 6-rivet step connection onto aluminum frame for durability and strength;
- Innovative stile design adds to the ladder's stability and reliability



Aluminium Extension Ladders

Page 7 - 11

- Electroplated mild steel locking system promotes secure operation;
- Non-slip, non-scuff PVC feet to promote safety and stability;
- Lightweight design to facilitate easy handling and transportation;
- Safe working load of 115 kg with a maximum static load of 135 kg;
- Step raise of 28 cm for comfortable climbing
- Non-slip profiled rungs (3.0 cm x 3.0 cm) offer enhanced grip
- Rust-proof construction ensures durability
- Strong design engineered for prolonged safety
- All steel components galvanized for corrosion resistance

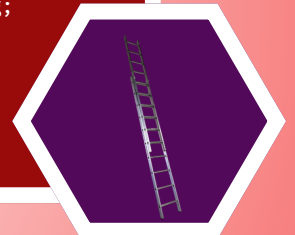

Partial and Full Fiber Single and Double-Sided Ladders - Page 12 - 14


- Double riveted, ant-pinch hinge for enhanced stability and durability;
- **Partial fibre (Single Sided):** Aluminium steps with fibre legs;
- Maximum working load capacity of 150kg (commercial use);
- **Full fibre (Single and Double sided):** Fibre steps with fibre legs
- Maximum working load capacity of 170kg (industrial use)
- Slip-resistant feet for secure footing in various surfaces;
- 6-rivet connection to legs for added strength and reliability;
- Rust, rot, and splinter-proof construction for maintenance-free durability;
- Non-conductive material ensures safety around electrical hazards;
- Weather and water-resistant design for outdoor applications;
- Unique cap design features multifunctional tool slots and a paint can holder.



Castors and Wheels

Page 15



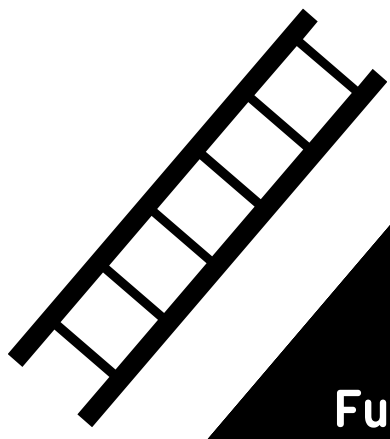

Medium-Duty Single-Sided Range

Max
Safe Load



150KG


Full aluminium A-Frame step ladder
Suitable for light industrial and
household / DIY use




- Maximum safe working load 150 kg
- 6-months manufacture's guarantee
- 6-rivet step connection to stile
- Anti rust




Range
Illustration
(ILMD006)

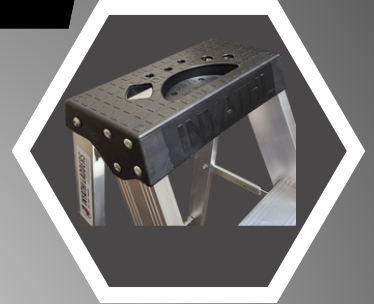

PVC cap / top with tool holder

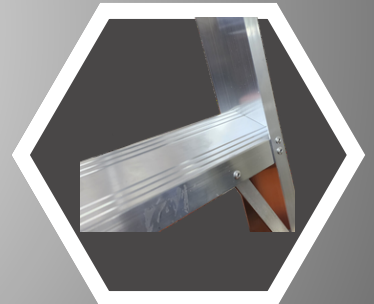

80 mm anti-slip profiled steps

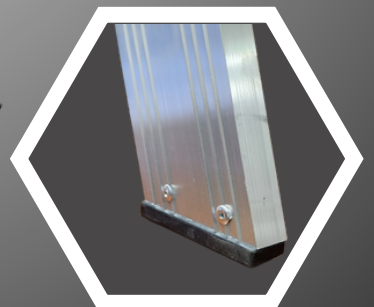

Anti slip, PVC feet

Ladder Code	Height (meter)	Number of Steps + PVC Cap
ILMD003	0.9	2 + PVC Cap
ILMD004	1.2	3 + PVC Cap
ILMD005	1.5	4 + PVC Cap
ILMD006	1.8	5 + PVC Cap
ILMD008	2.4	7 + PVC Cap
ILMD010	3.0	9 + PVC Cap
ILMD012	3.6	11 + PVC Cap





Max
Safe Load




150KG

Medium-Duty Double-Sided Range


Full aluminium A-Frame step ladder
Suitable for light industrial and
household / DIY use

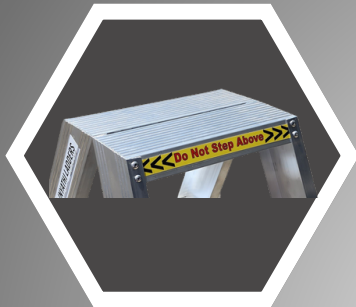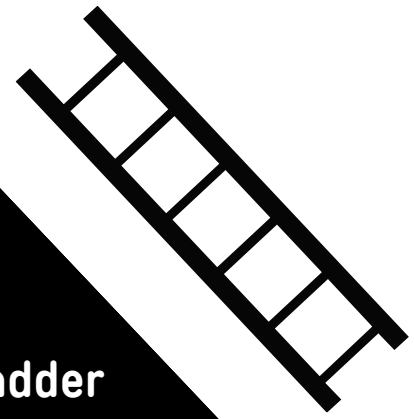

Easy Step-on top design

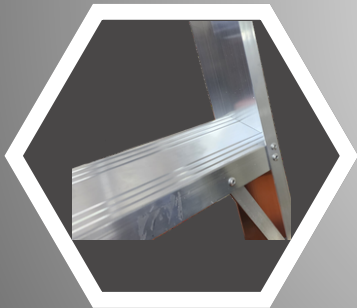

80 mm anti-slip profiled steps

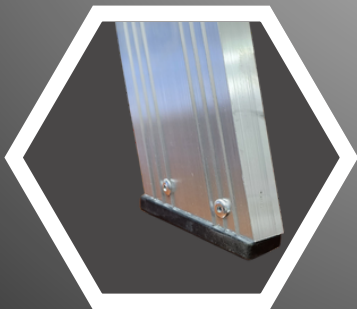

Anti slip, PVC feet



- Maximum safe working load 150 kg
- 6-months manufacture's guarantee
- 6-rivet step connection to stile
- Anti rust



Range
Illustration
(ILDM002)

Ladder Code	Number of Steps	Height (meter)
ILDM002	2	0.6




Heavy-Duty Single-Sided Range

Max
Safe Load




170KG


Full aluminium single sided A-Frame
step ladder
Suitable for industrial use

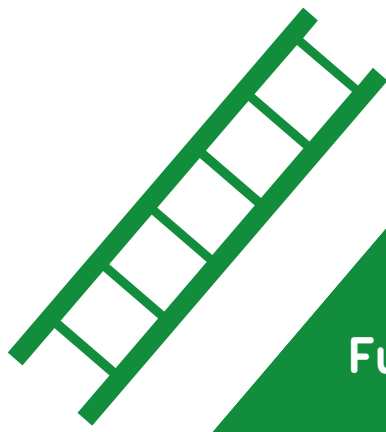


- Maximum safe working load 170 kg
- 6-months manufacture's guarantee
- 6-rivet step connection to stile
- Anti rust

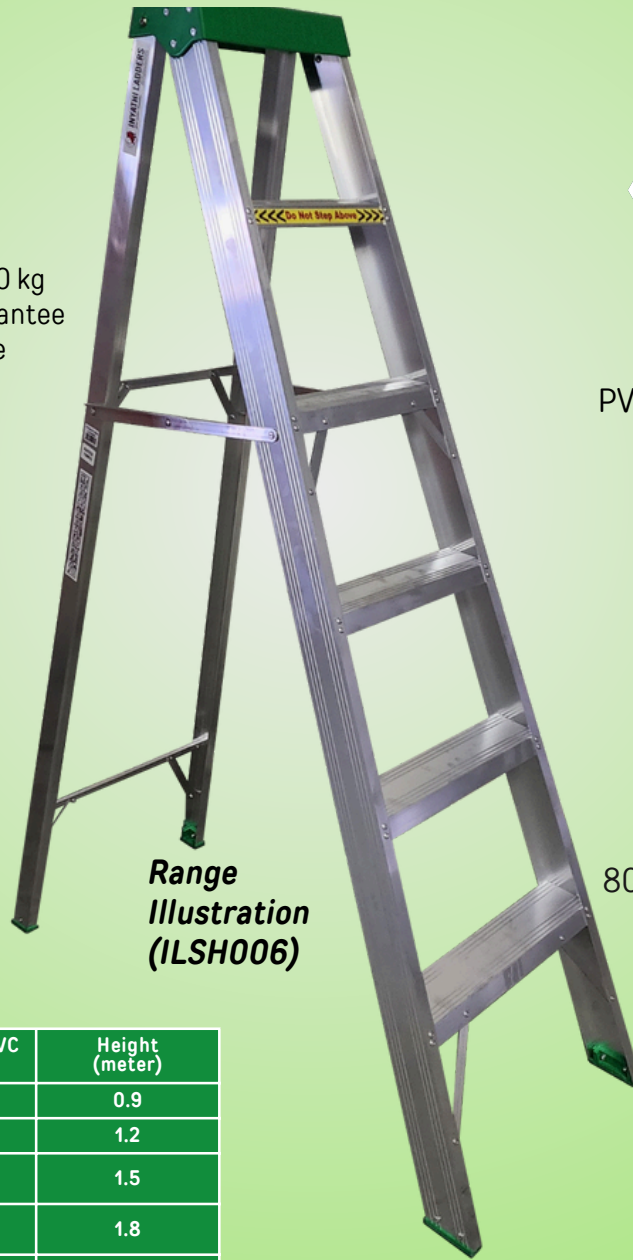


Range
Illustration
(ILSH006)

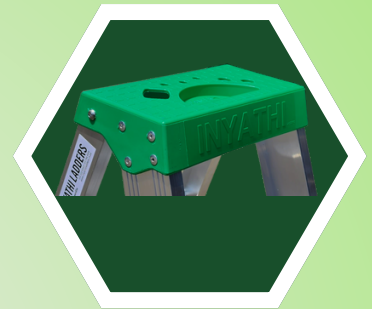

PVC cap / top with tool holder

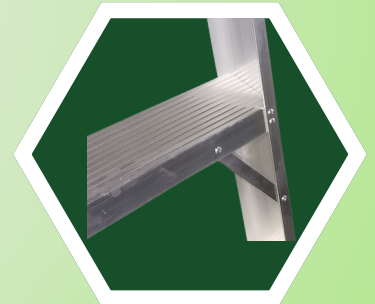

80 mm anti-slip profiled steps

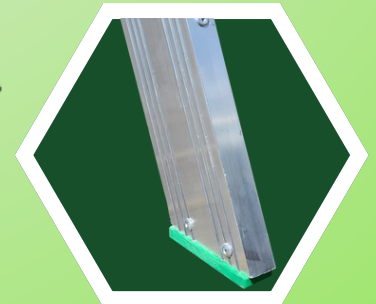

Anti slip, PVC feet

Ladder Code	Number of Steps + PVC Cap	Height (meter)
ILSH003	2 + PVC Cap	0.9
ILSH004	3 + PVC Cap	1.2
ILSH005	4 + PVC Cap	1.5
ILSH006	5 + PVC Cap	1.8
ILSH008	7 + PVC Cap	2.4
ILSH010	9 + PVC Cap	3.0

ILSH012*	11 + PVC Cap	3.6
ILSH014*	13 + PVC Cap	4.2
ILSH016*	15 + PVC Cap	4.8


* Strengthened frame / steps for extra durability

Max
Safe Load




170KG


Heavy-Duty Double-Sided Range

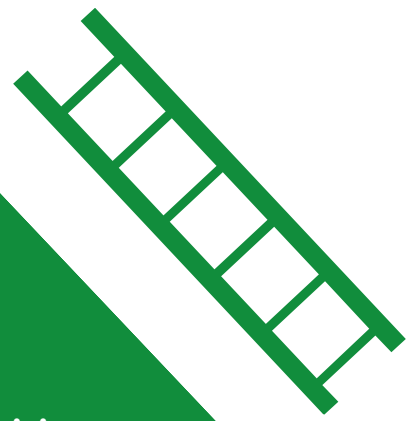


Full aluminium A-Frame step ladder
Suitable for industrial use

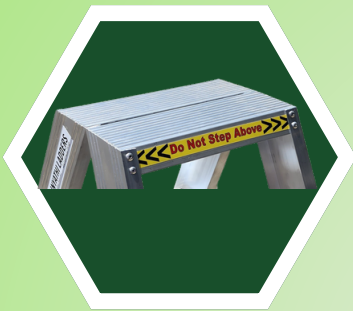

Easy Step-on top design

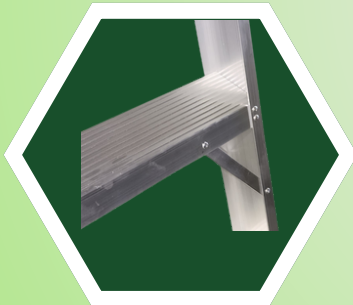

80 mm anti-slip profiled steps

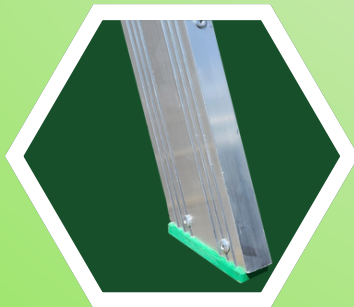

Anti slip, PVC feet



Range
Illustration
(ILSH006)



- Maximum safe working load 170 kg
- 6-months manufacture's guarantee
- 6-rivet step connection to stile
- Anti rust

Ladder Code	Number of Steps + PVC Cap	Height (meter)
ILD002	2 + PVC Cap	0.9
ILD003	3 + PVC Cap	1.2
ILD004	4 + PVC Cap	1.5
ILD006	5 + PVC Cap	1.8
ILD008	7 + PVC Cap	2.4
ILD010	9 + PVC Cap	3.0

ILD012*	2 + PVC Cap	3.6
ILD014*	3 + PVC Cap	4.2
ILD016*	4 + PVC Cap	4.8

* Strengthened frame /metal for extra safety

Medium-Duty Lean-To Ladder Range

Full aluminium Lean-To ladder
Suitable for light industrial and
household / DIY use

Max
Safe Load




135KG




- Maximum Safe working load 135kg
- 6-months manufacture's guarantee
- Anti rust

Range
Illustration
(ILEX108)

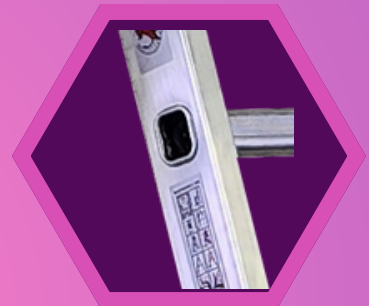

Square rung design

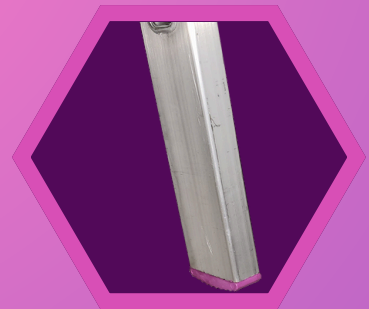

Anti slip, PVC feet

Ladder Code	Number of Rungs	Height (meter)
ILE107	7	2.0
ILE108	8	2.3
ILE110	10	2.8
ILE111	11	3.0
ILE113	13	3.6
ILE115	15	4.2
ILE117	17	4.8




Max
Safe Load




135KG

Medium-Duty Push-Up Extension Ladder Range


Full aluminium extension ladder
Suitable for light industrial and
household / DIY use

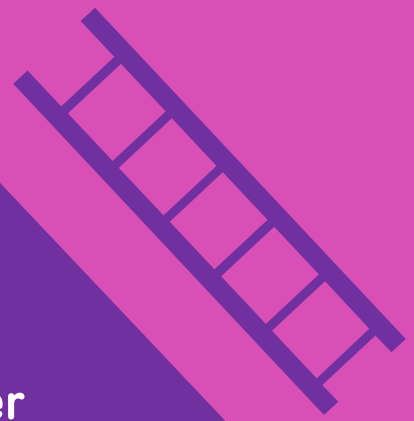

Galvanized Steel Guides

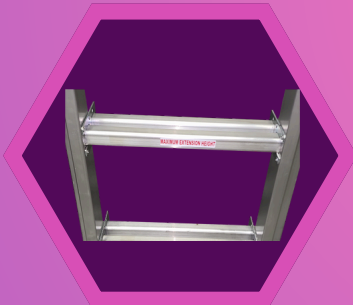

Double Retainer for extra stability

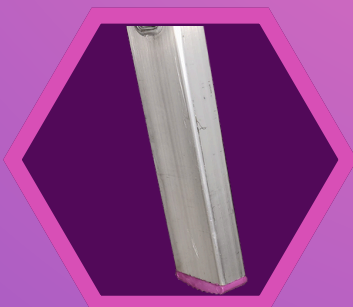

Anti slip, PVC feet



Ladder Code	Number of Rungs	Close / Open Height (meter)
ILEX480	10/18	2.8/4.8
ILEX540	11/20	3.0/5.4
ILEX600	12/22	3.4/6.0
ILEX660	13/24	3.6/6.6
ILEX720	14/26	3.9/7.2
ILEX780	15/28	4.2/7.8
ILEX900	17/32	4.8/9.0



- Maximum safe working load 135 kg
- 6-months manufacture's guarantee
- Anti rust

Range
Illustration
(ILEX480)



Medium-Duty 3-Function Extension Ladder Range

Max
Safe Load



135KG

Full aluminium extension ladder
Suitable for light industrial and
household / DIY use




- Maximum safe working load 135 kg
- 6-months manufacture's guarantee
- Anti rust

Range
Illustration
(ILEX208)


Ladder Code	Number of Rungs when open	Close / Open Height (meter)
ILEX206	10	1.7/2.5
ILEX207	12	2.0/3.1
ILEX208	14	2.3/3.7
ILEX209	16	2.6/
ILEX210	18	2.9/4.7



Galvanized Steel Guides

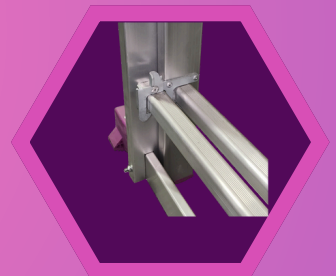

Retainer with Latch
for extra stability

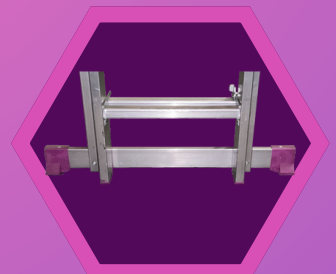

700MM Stabilizing
Bottom Bar

Max
Safe Load




135KG

Medium-Duty 5-Function Extension Ladder Range


Full aluminium extension ladder
Suitable for light industrial and
household / DIY use



Galvanized Steel Guides

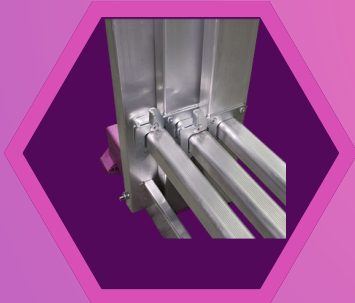

Double Retainer
with Latch system

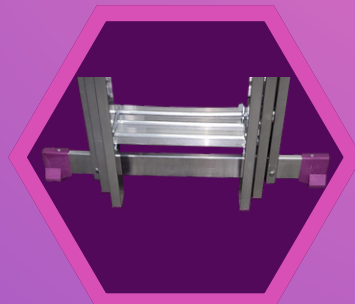


700MM Stabilizing
Bottom Bar



- Maximum safe working load 135 kg
- 6-months manufacture's guarantee
- Anti rust

Ladder Code	Number of Rungs when open	Close / Open Height (meter)
ILEX306	14	1.7/3.8
ILEX307	17	2.0/4.6
ILEX308	20	2.3/5.8
ILEX309	23	2.5/6.5
ILEX310	26	2.9/7.3

Range
Illustration
(ILEX306)

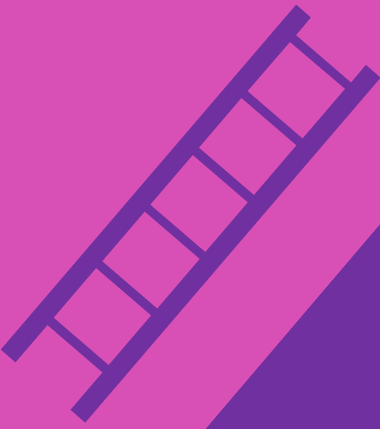

Medium-Duty Multipurpose Ladder Range

Full aluminium Multipurpose Ladder
Suitable for household / DIY use


Max Safe Load



120KG



Range Illustration (ILAM3.3)

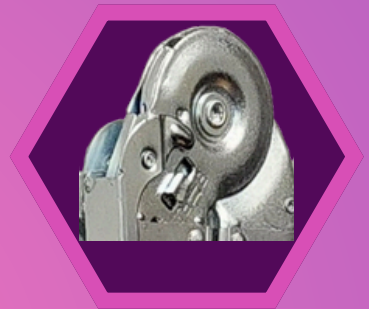

Pinch resistant hinge with safety lock



600MM Stabilizing Bottom Bar



- Maximum Safe working load 120 kg
- 6-months manufacture's guarantee
- Anti rust

Ladder Code	Number of Rungs when open	Open Height (meter)
ILAM3.3	12	3.3



Partial Fibre Single Sided A-Frame Range



Max
Safe Load



150KG


A-Frame step ladder
Suitable for light industrial and
household / DIY use



PVC cap / top
with tool holder



80 mm anti-slip
profiled steps

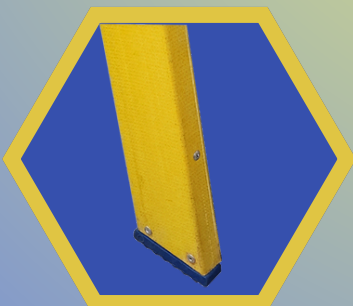

Anti slip, PVC feet



**Range
Illustration
(ILSPF006)**



- Maximum safe working load 150 kg
- 6-months manufacture's guarantee
- 6-rivet step connection to stile
- Anti rust

Ladder Code	Number of Steps + PVC Cap	Height (meter)
ILSPF004	3 + PVC Cap	1.2
ILSPF006	5 + PVC Cap	1.8
ILSPF008	7 + PVC Cap	2.4
ILSPF010	9 + PVC Cap	3.0
ILSPF012	11 + PVC Cap	3.6
ILSPF014	13 + PVC Cap	4.2
ILSPF016	15+ PVC Cap	4.8



Full Fibre Single Sided A-Frame Range

Max
Safe Load



170KG

A-Frame step ladder
Suitable for industrial use



- Maximum safe working load 170 kg
- 6-months manufacture's guarantee
- 6-rivet step connection to stile
- Anti rust

Range
Illustration
(ILSFF006)



PVC cap / top with
tool holder



80 mm anti-slip
\profiled steps



Anti slip, PVC feet

Ladder Code	Number of Steps + PVC Cap	Height (meter)
ILSFF004	3 + PVC Cap	1.2
ILSFF006	5 + PVC Cap	1.8
ILSFF008	7 + PVC Cap	2.4
ILSFF010	9 + PVC Cap	3.0
ILSFF012	11 + PVC Cap	3.6
ILSFF014	13 + PVC Cap	4.2
ILSFF016	15+ PVC Cap	4.8



Max
Safe Load

170KG

Full Fibre Double Sided A-Frame Range

A-Frame step ladder
Suitable for industrial use



Easy Step-on top design



80 mm anti-slip
profiled steps



Anti slip, PVC feet



- Maximum safe working load 170 kg
- 6-months manufacture's guarantee
- 6-rivet step connection to stile
- Anti rust

**Range
Illustration
(ILDFF006)**

Ladder Code	Number of Steps + PVC Cap	Height (meter)
ILDFF004	3 + PVC Cap	1.2
ILDFF006	5 + PVC Cap	1.8
ILDFF008	7 + PVC Cap	2.4
ILDFF010	9 + PVC Cap	3.0
ILDFF012	11 + PVC Cap	3.6
ILDFF014	13 + PVC Cap	4.2
ILDFF016	15+ PVC Cap	4.8



Castors and Wheels

Nylon Twin Threaded



Grey Rubber Swivel Brake



Grey Rubber Bolt Hole



Grey Rubber Wheel



Cast Iron Swivel



White Nylon Swivel Plate



Polyurethane Fixed Plate



Polyurethane Swivel Plate



Nylon Twin Plate & Brake



Cast Iron Fixed Plate



Cast Iron V-Groove



Lawn Mower Wheels



Solid Rubber



Blue Super Elastic Ball Bearing



Nylon Fixed Plate



Trolley's

Platform Trolley



Sack Trolley



Brewery Trolley



JNR Folding Nose Trolley



Merchandising Trolley



Coke Trolley



Double Gas Cylinder



Medium Folding Nose



Drum Decanting Trolley



Large Folding Nose Trolley



Please contact us for our full range of Trolleys, Castors & Wheels

CONTACT US TODAY

Tel (+27) / 010 222 0042 / 011 794 4456

Unit 3 & 4, Bition Mini Park, 1474 Cranberry Street, Honeydew, South Africa, 2170

office@inyathiladders.co.za

www.inyathiladders.co.za

OFFICE HOURS

Mon-Fri: 7:30 to 16:30

Closed on Public Holidays



Repairs and Spare Parts:

Contact us for repair assistance. Furthermore, we provide selected spare parts such as ladder feet and ladder caps for most of our ladder ranges.

Deliveries

At our core, we recognize the paramount importance of timely delivery to our valued customers.

Hence, we proudly provide nationwide shipping services with swift delivery timelines. Our commitment is to dispatch your stock within 5 working days across the country. Additionally, for your convenience, we extend the option of direct factory collections at our Honeydew Branch situated in Gauteng, South Africa. Feel free to reach out to us for personalized delivery quotations.